





CAMS Software Corporation

Mobi Driver User Manual

Version 1.0

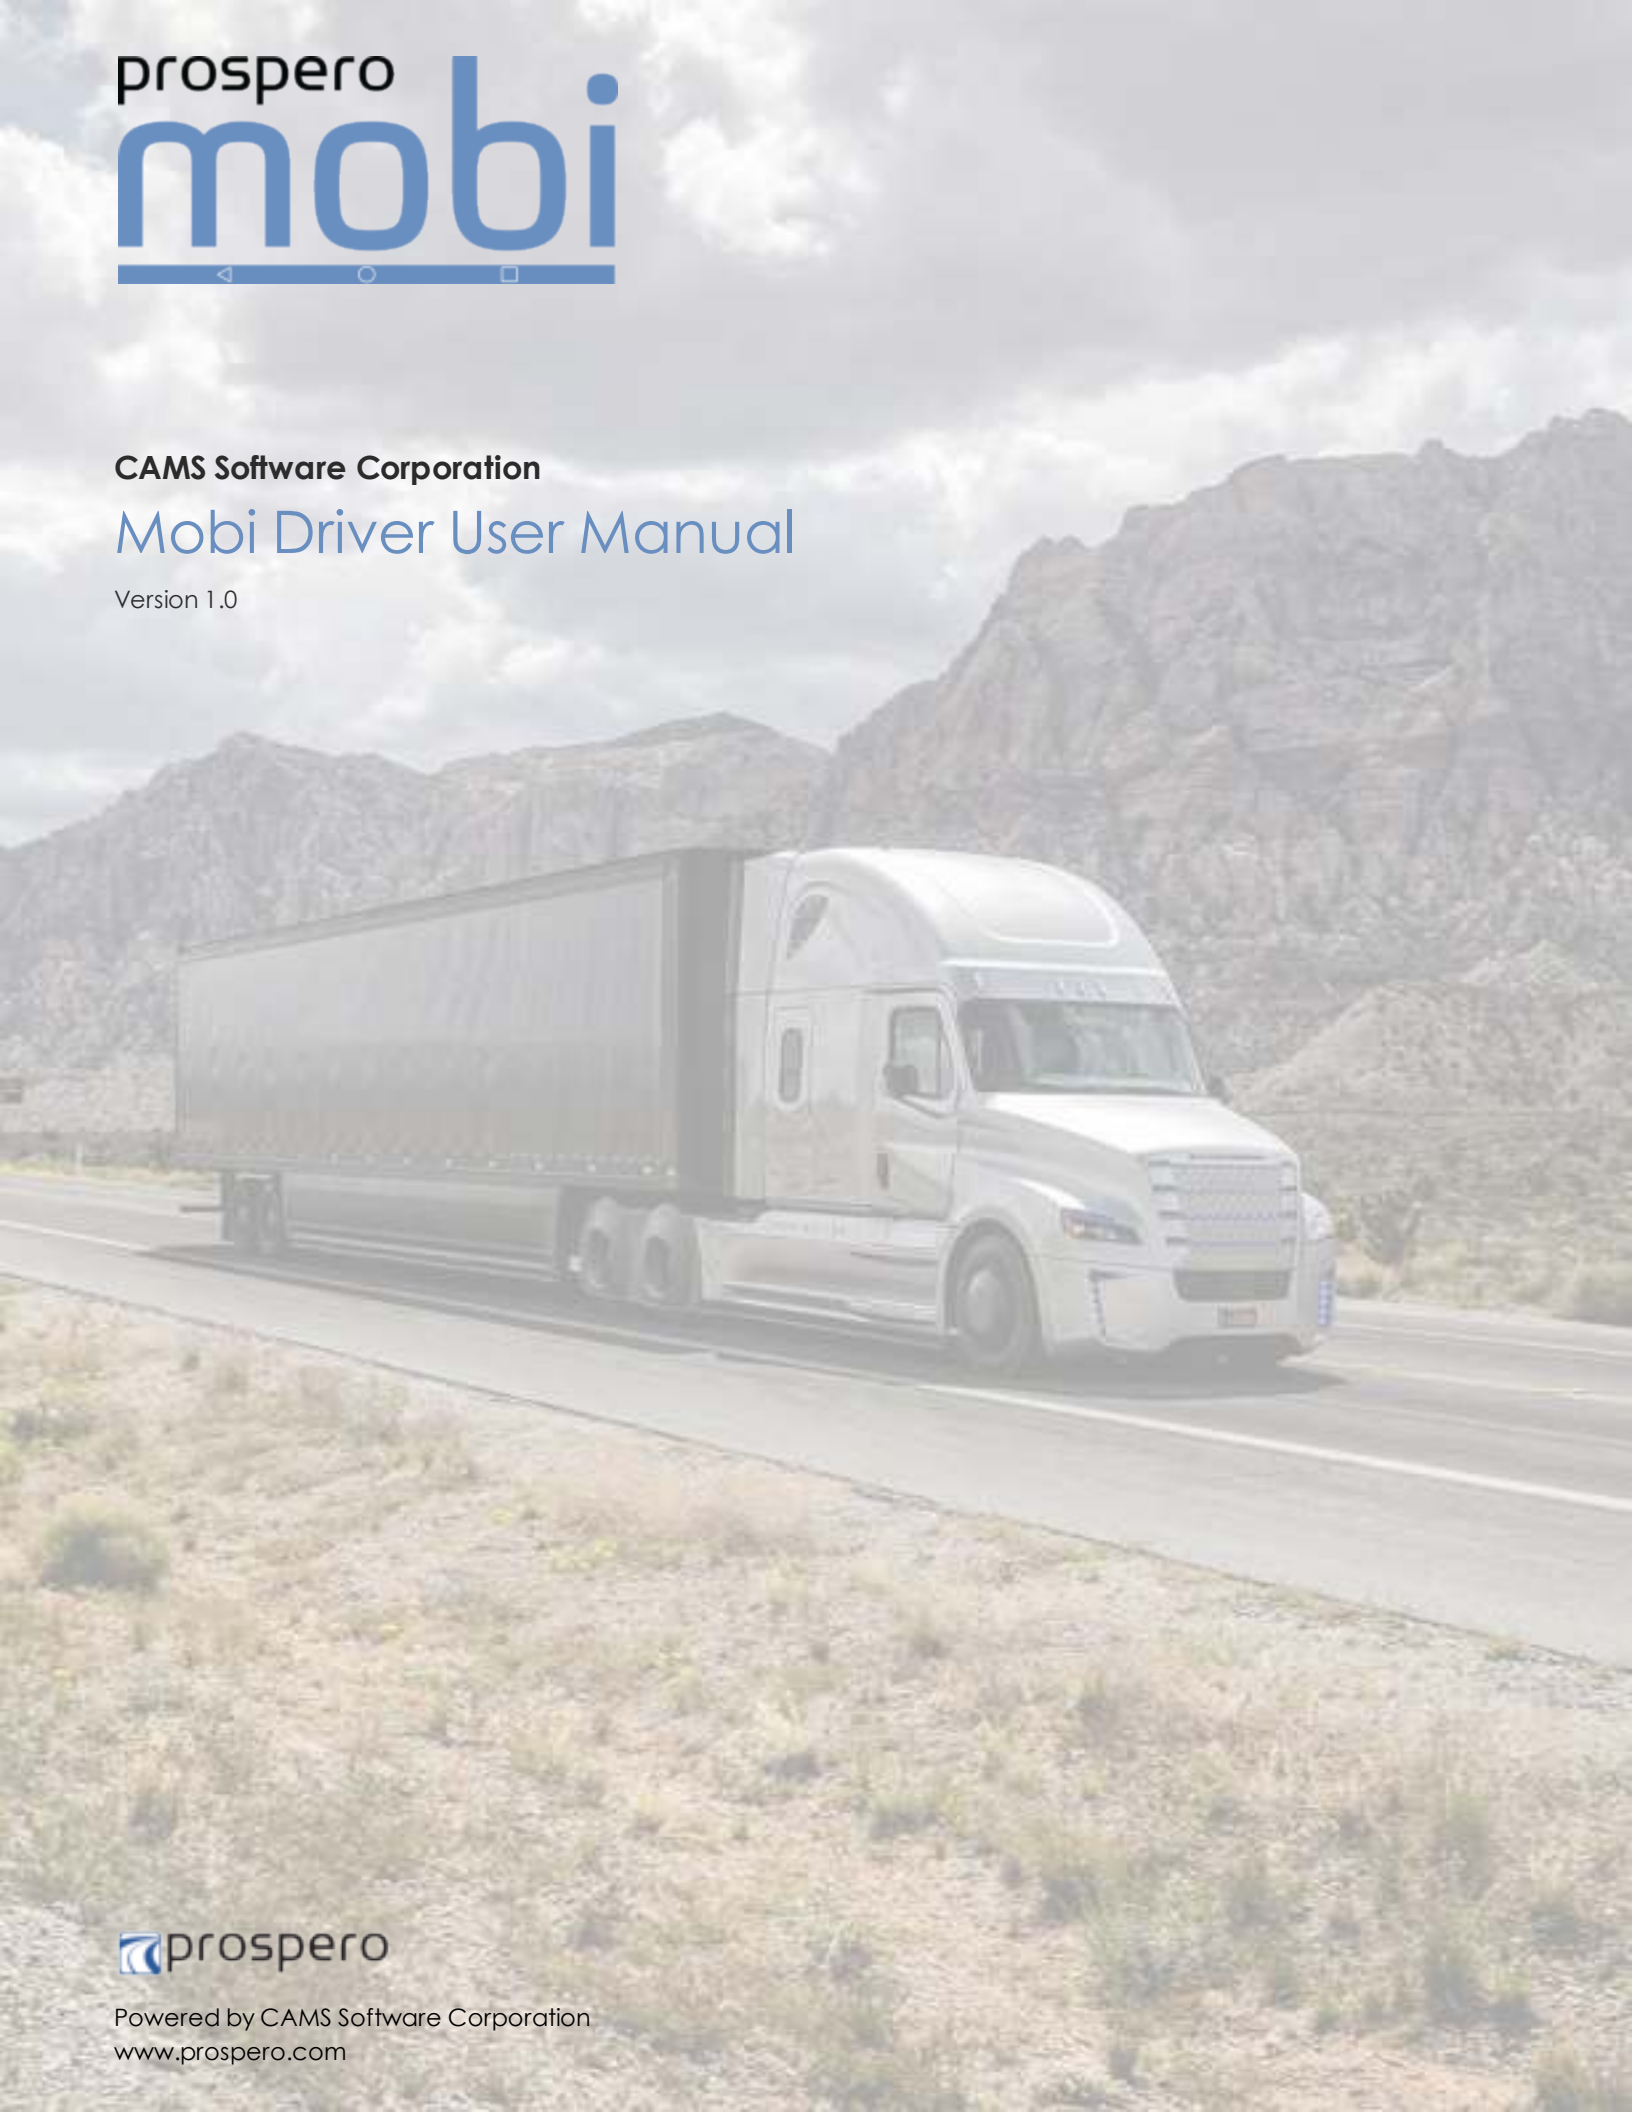

Powered by CAMS Software Corporation
www.prospero.com

Legal Notice and Disclaimer

The legislation and rules concerning the installation and operation of Electronic Logging Devices vary between States. It is the Motor Carrier's responsibility to install the ELD and the driver's responsibility to use the ELD in a manner that complies with the law and will not cause accidents, personal injury or property damage. The vehicle driver is solely responsible for observing safe driving practices.

CAMS Software Corporation disclaims all liability for any use of the ELD in a way that may cause accidents, damage or violate the Law.

Copyright 2017 CAMS Software Corporation. All rights reserved.

Information in this document is subject to change without notice. The software described in this document is furnished under a license agreement or nondisclosure agreement. The software may be used or copied only in accordance with the terms of those agreements. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or any means electronic or mechanical, including photocopying and recording for any purpose other than the purchaser's personal use without the written permission of CAMS Software Corporation.

CAMS Software Corporation

200 - 8651 Eastlake Drive
Burnaby, British Columbia V5A 4T7
604-777-2267

Table of Contents

Company Information	4
Introduction	5
Mobi Home Screen	6
Mobi Header	7
Driving Mode	8
Initial Sign In	9
Secondary Sign In	10
Sign Out	11
Driver Vehicle Inspections	12
Duty Status Change	15
Hours Remaining	17
Driver Logs	19
Correcting Driver Logs	20
Motor Carrier Edit Suggestions	23
Certifying Driver Logs	25
DOT Roadside Inspection Guide	27
ELD Data Transfer	28
Unidentified Driver Records	29
Team Driving	31
Setting Active Driver	32
Switching Accounts	33
Reports	34
Malfunctions and Data Diagnostic Events	35
Data Diagnostic Events	36
Malfunctions	37
Connections	38
Tablet Docking	40
Technical Support	41

Company Information

CAMS Software provides innovative transportation solutions designed specifically to meet the distinct and demanding requirements of large-scale grocery distribution. Since 1998, we have deployed to over 115 major grocery distribution centers all across North America.

Grocery transportation typically involves short-range distribution of grocery and perishable product to and from the same locations over and over. Oftentimes this is done using a large private fleet. Most Transportation Management Systems (TMSs) are designed primarily for shipping with the lowest cost of transportation, not necessarily managing your own private fleet and all the associated challenges.

CAMS Software designs solutions to handle the numerous challenges unique to grocery transportation such as driver bids, activity based compensation, on-time delivery performance and tracking, backhaul and salvage optimization, reusable asset tracking, driver efficiency tracking and so on. For these reasons, CAMS Software is the TMS solution provider of choice for more major grocery companies than any other TMS.

CAMS Software Corporation

200 - 8651 Eastlake Drive
Burnaby, British Columbia V5A 4T7

Phone: 604-777-2267
Toll Free: 1-866-699-CAMS (2267)
Product Sales: sales@camspro.com

Introduction

Mobi is a full-featured onboard computer system for commercial truck fleets. It is also a certified electronic logging device (ELD) used to record driver records of duty status (RODS).

Mobi is an Android application running on a tablet mounted on the tractor dashboard. It is integrally synchronized with the tractor engine control module (via J1939) to automatically record engine power status, engine hours, mileage, vehicle motion status, speed and other operational data.

Mobi captures tractor location and routing data using the global positioning system (GPS) and communicates via a cellular data network with the Mobi cloud-hosted application. This back office application, accessed through a web browser, is used to monitor driver duty times, edit hours-of-service logs, generate ELD reporting and provide troubleshooting support.

System Overview




ELD Certification

Mobi has been tested and self-certified to be compliant with US FMCSA ELD regulations including all the most recent amendments. The driver's log file export is generated according to the latest ELD data element dictionary released by FMCSA.

Mobi Home Screen

The home screen serves as your gateway to all Mobi electronic logging device (ELD), trip management and other onboard computer system functionality. The home screen consists of an upper notification bar and a lower grid of user tools.

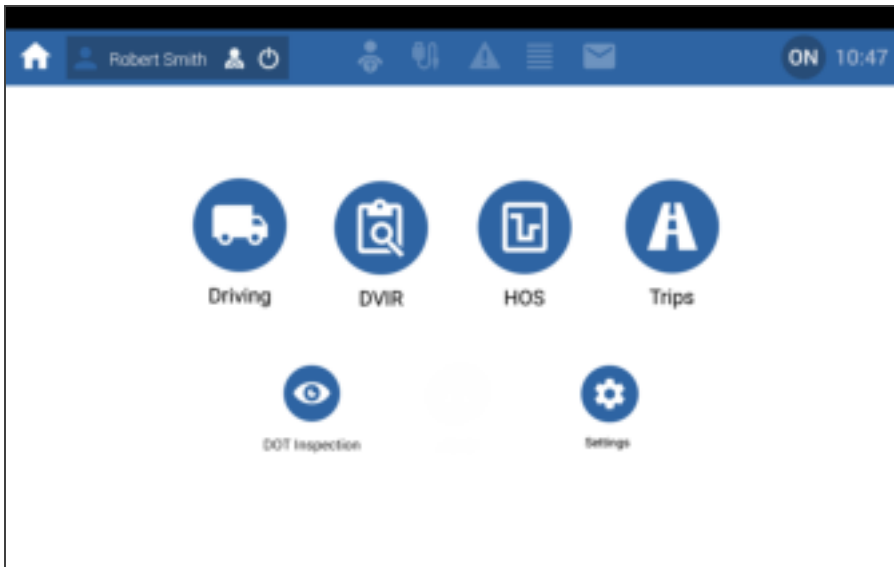

Mobi locks the tablet rotation in landscape mode

Mobi Tools



Driving. Tap this icon to accept or reject a dispatched trip



Vehicle Inspections. Tap this icon to complete a pre or post-trip vehicle inspection



Hours of Service. Tap this icon to view your drive, break, shift and cycle hours remaining



Trips. Tap this icon to view all trips on your current shift



DOT Inspection. Tap this icon to transfer driver logs to the roadside inspector



System Settings. Tap this icon to change setup and configuration. This button is only accessible to system administrators

Mobi Header

Icons located along the upper Mobi header are user interactive and serve as alerts, menus or links to screens with related information.

Driver Account



Driver account. Tap icon to sign in, sign out, switch driver accounts and set the active driver.

Home Page



Home page. Tap icon to return to the home page.

Driver Duty Status - Tap Icon to Change Duty Status



Driver is off duty (OFF)



Driver is on duty (ON)



Driver in sleeper berth (SB)



Driver is driving (D)



Driver is driving in personal conveyance mode (off duty)



Driver is driving in yard moves mode (on duty)

Alerts - Tap Icon for More Information



Unidentified driver logs



Engine connection status



System malfunctions and data diagnostic events




Recommended driver log edits to be reviewed and approved



Driver messages

Driving Mode

Mobi automatically changes your duty status to **Driving** as soon as your vehicle reaches five miles per hour. The driving mode grays out and will not allow driver interaction for safety reasons.

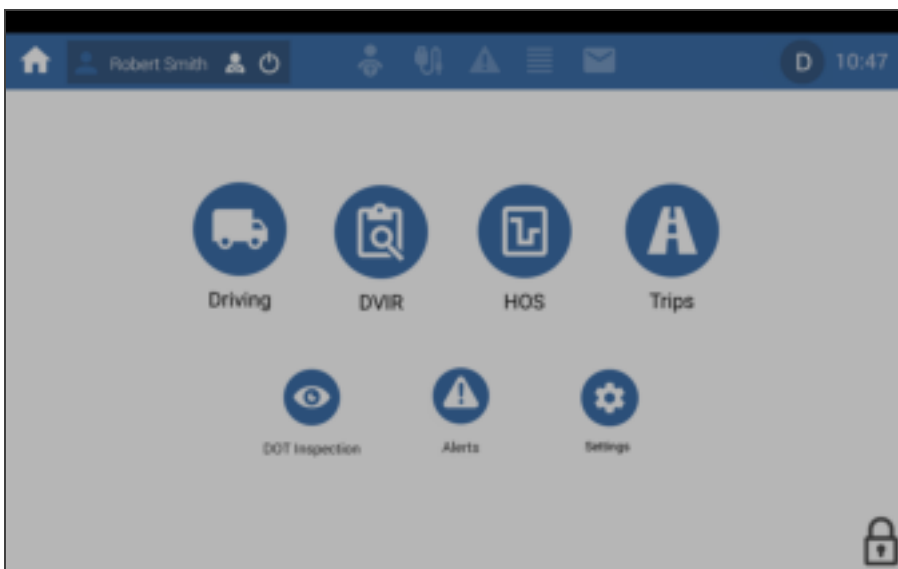

The screen will remain grayed out and inactive until the vehicle has stopped and remains stationary for three seconds.



A co-driver can view and edit logs while the vehicle is in motion. See **Switching Accounts**.

Initial Sign In

Drivers are required to sign in to open a new session in the Mobi application.



To sign in to Mobi:

1. Enter your username.
2. Enter your password.
3. Tap the **Sign In** button.



The first driver is set to active by default. This procedure assumes that you are the first to sign in. If not, see **Secondary Sign In**.




Contact your system administrator to ensure that your driver account has been setup in the Mobi Back Office. You will require a valid user name and password to sign in to the Mobi tablet and Back Office.

Secondary Sign In

Secondary drivers sign into an existing session of the Mobi application **before** the vehicle is put into motion.



To sign in to Mobi:

1. Tap the home icon  in the upper-left notification panel.
2. Tap the driver account panel tool in the notification panel to sign in. This takes you to the sign-in screen.



3. Enter your username.
4. Enter your password.
5. Tap the **Sign In** button.



The secondary driver is set to inactive by default. Their account is set to active by default. This procedure assumes that you are the second to sign in. If not, see **Initial Sign In**.



Contact your system administrator to ensure that your driver account has been setup in the Mobi Back Office. You will require a valid user name and password to sign in to the Mobi tablet and Back Office.

Sign Out

To close the current session and sign out of the Mobi application.

To Sign Out


1. If there is a co-driver, tap the driver account tool in the notification panel to select the driver to sign out.



2. Tap the **Sign Out** icon. This takes you to the sign-out screen.



3. Tap the **Sign Out** button.

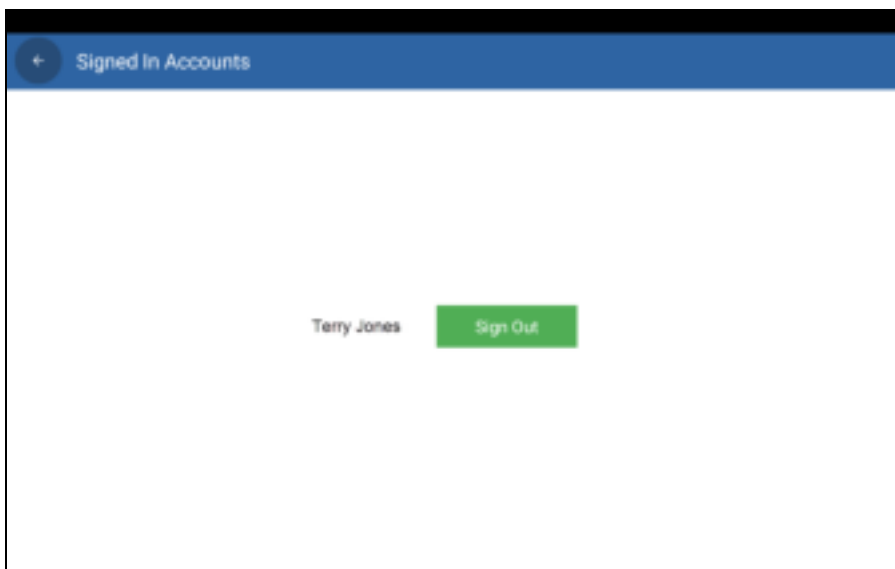


Drivers cannot sign out while the vehicle is in motion.


Driver Vehicle Inspections

Mobi enables drivers to capture detailed tractor and trailer information as part of their pre or post-trip vehicle inspections. It also supports interim inspections required to check repairs resulting from the pre-trip inspection or if multiple trailers were picked up or dropped off. Having completed your vehicle walk around, you then capture the inspection results in the Mobi tablet.

Equipment Selection

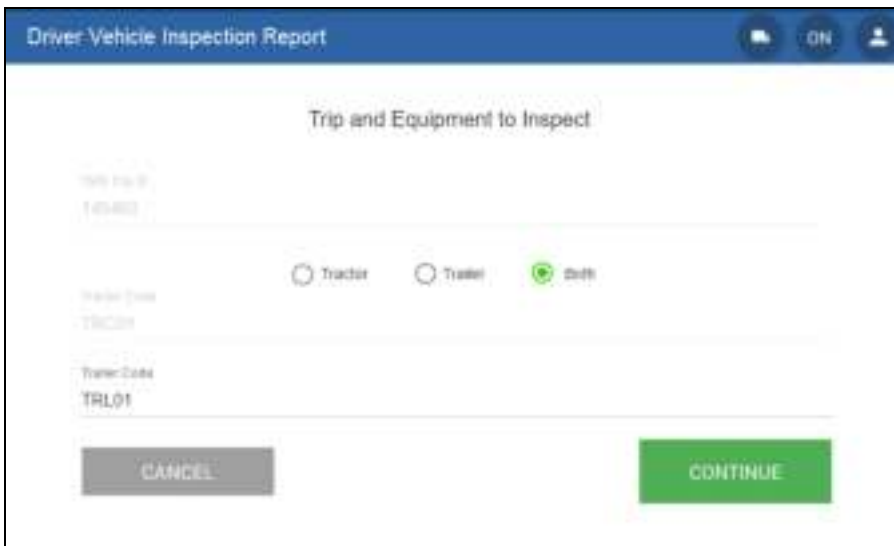

To Select the Equipment to be Inspected

1. Tap the **DVIR** button  located on the home screen.
2. Enter the trip ID.



The Trip ID will be pre-populated if you have already accepted a trip.

3. Select whether to inspect the tractor, trailer or both.
4. Enter the tractor and trailer codes if required.
5. Tap the **Continue** button.

To Enter Tractor Inspection Results

	PASS	FAIL	UNTESTED		PASS	FAIL	UNTESTED
Service Brakes	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	Parking Brakes	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Steering Mechanism	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	Lights and Reflectors	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Tires	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	Wheels and Rims	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Horn	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	Wipers	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
Mirrors	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	Coupling devices	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Emergency Equipment	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>				

CANCEL PASS ALL CONTINUE

1. Enter any tractor defects or safety issues by tapping either **Pass**, **Fail** or **Untested**.
2. Tap the **Continue** button.

COMMENTS

DRIVER SIGNATURE

MECHANIC SIGNATURE

BACK CONTINUE

3. Enter any comments relating to the tractor inspection.
4. Use your finger to add your signature or initials to sign off the tractor inspection.
5. Tap the **Continue** button.



Inspection exceptions will generate an alert in the Mobi Back Office signifying a failed inspection. A mechanic will then be required to resolve the exception(s) and sign off on any repair(s).

To Enter Trailer Inspection Results

	PASS	FAIL	UNTESTED		PASS	FAIL	UNTESTED
Brakes	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	Lightning devices	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Wheels, rims, tires	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	Air line connections	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
King pin coupling	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	Rails/Support frames	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Tie down bolsters	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	Locking pins	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>
Sliders/Frame lock	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	Coupling devices	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>

BACK PASS ALL CONTINUE

1. Enter any trailer defects or safety issues by tapping either **Pass**, **Fail** or **Untested**.
2. Tap the **Continue** button.

COMMENTS

DRIVER SIGNATURE

BACK COMPLETED

3. Enter any comments relating to the trailer inspection.
4. Use you finger to add your signature or initials to sign off the trailer inspection.
5. Tap the **Completed** button.



You can tap the **Pass All** button to quickly pass all inspection points or use the **Back** button to return to the previous inspection screen.

Duty Status Change

Driver duty status is updated both manually and automatically by Mobi in accordance with FMCSA ELD rules.


Automated Mobi Duty Status Changes

Mobi automatically switches to driving mode once the vehicle is moving at a speed of five miles per hour or more. When the vehicle has been in motion and then stops for five consecutive minutes, Mobi prompts the driver to confirm their continued driving status or change their duty status. If the driver does not respond to this prompt within one minute, Mobi automatically switches the duty status to on-duty not driving.

Manually Setting Your Duty Status

With the exception of the automated duty status changes above, all other duty status changes must be performed manually by the driver.

1. Tap the duty status icon when the vehicle is at a full stop.
2. Select your new duty status from the drop-down menu. There are four different status activities: **Off Duty**; **Sleeper Berth**; **Driving** and **On-Duty** (on duty not driving).

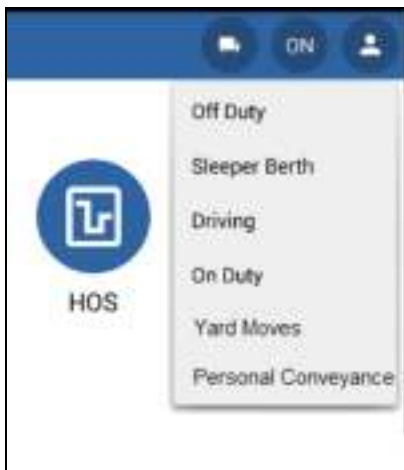

3. Tap **Yes** when asked to confirm your duty status change.
4. If **Off Duty** is selected, select your reason for going off duty. There are three reasons: **Meal**, **Layover** and **Other**.
5. Tap **OK**. Your duty status is updated.

Special Driving Categories

The FMCSA has outlined two special driving categories that allow you to keep driving time off your log. Personal conveyance, or personal use, is off-duty time and does not increment your drive time. Yard moves, used to move equipment and material around the yard, is on-duty time and also does not increment your drive time.



Support for these driving categories is optional. They will only be visible if configured by your system administrator.

Personal Conveyance

Personal conveyance is Off Duty time when you use the vehicle exclusively for your personal use — such as driving back home or getting dinner after your shift. According to the personal conveyance rule, work-related activities must not take place while operating the vehicle for personal use.

You will be prompted for comments when setting duty status to personal conveyance.

A screenshot of a mobile application dialog box titled "Change your situation to PC?". The dialog contains the text "Agreeing will change your duty status to OFF" and a label "Comments or annotations:" followed by a text input field. At the bottom, there are two buttons labeled "No" and "Yes".

In the event that the vehicle is powered down in this status, Mobi will prompt you if you want to remain in this status on vehicle power up.

Yard Moves

Yard moves are On Duty time. Yard moves occur when the vehicle is driven in the yard or distribution center. While Yard Moves occur On Duty, they do not add to your Driving time.

You will be prompted for comments when setting duty status to yard moves.

A screenshot of a mobile application dialog box titled "Change your situation to YM?". The dialog contains the text "Agreeing will change your duty status to ON" and a label "Comments or annotations:" followed by a text input field. At the bottom, there are two buttons labeled "No" and "Yes".

In the event that the vehicle is powered down in this status, Mobi will prompt you if you want to remain in this status on vehicle power up.



Tap on **YM** (Yard Move) or **PC** (Personal Conveyance) before driving, otherwise duty status is automatically captured as **Driving** when the vehicle reaches five miles per hour.

Hours Remaining

The Mobi tablet provides real-time monitoring of your driving hours. Your hours remaining can be viewed by tapping the **HOS** button on the home screen. This takes you to the **Hours of Service** screen that shows your drive, break, shift and cycle hours remaining.



Drive Time Gauge

This gauge provides a real-time count down of your driving hours. You are allowed a total of eleven (11) hours of driving time during a period of 14 consecutive hours after being off duty for 10 or more consecutive hours.

Break Time Gauge

This gauge provides real-time count down to your next required off-duty break. The hours-of-service regulations require that if more than 8 consecutive hours have passed since the last off-duty (or sleeper-berth) period of at least 30 minutes, a driver must take an off-duty break of at least 30 minutes before driving.

Shift Time Gauge

This gauge provides real-time count down of your shift hours. Your 14-consecutive-hour driving window (shift) begins when you start any kind of work. Once you have reached the end of this 14-consecutive-hour period, you cannot drive again until you have been off duty for another 10 consecutive hours.

Cycle Time Gauge

This gauge provides real-time count down of your cycle time or weekly limit. Depending on the jurisdiction, the hours-of-service regulations impose a duty limitation of either 60 hours over 7 days or 70 hours over 8 days. This limit is based on a “rolling” or “floating” 7 or 8-day period.

Gauges will turn orange when you approach the limits on your drive, shift, break or cycle hours. Gauges when turn red when limits are exceeded.

Below the gauges, you can view the total time in your current duty status. You can also view your hours-of-service logs from this screen by tapping the **HOS** Logs button.



Most jurisdictions allow the motor carrier to define their cycle type.






Your hours remaining are also recorded and tracked in the Mobi Back Office thereby allowing dispatchers to access current information about your availability and generate driver reports including duty status, driving time and remaining hours of service.

Driver Logs

Mobi automatically records all your driving time. It records the date, time, location, engine hours, vehicle miles and driver identification at intervals of every sixty (60) minutes.

To view your HOS logs

1. Tap the **HOS** icon on the Mobi home screen.
2. Tap the **HOS Logs** button.
3. Tap  to advance a day or tap  to go back a day on the Duty Status Grid.

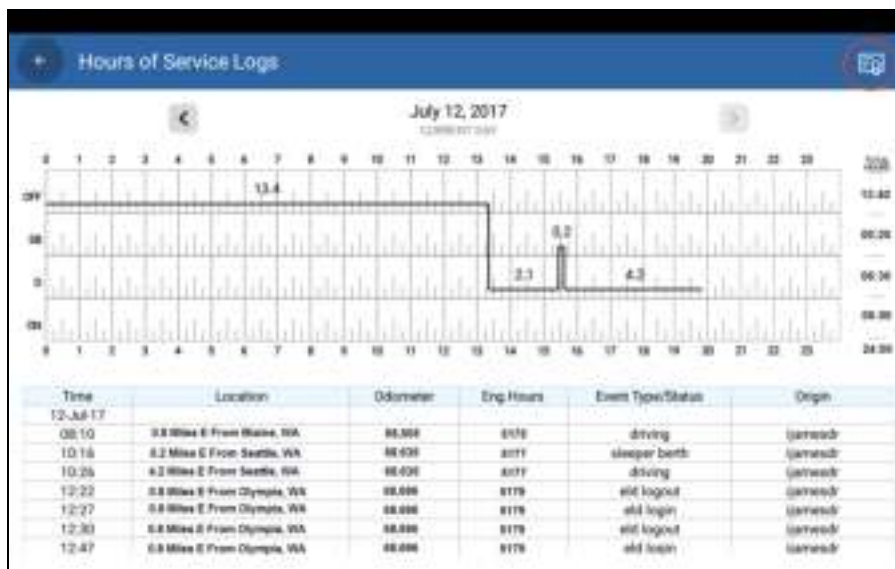

4. Drag the screen up with your finger to view all entries in the hours-of-service log for the selected day.




Mobi automatically records location with an accuracy of one-mile radius during on-duty driving periods and reduces the location accuracy to a 10-mile radius when the vehicle is used for authorized personal use.

Correcting Driver Logs

You make corrections (additions, edit and deletions) to your driver logs using the browser-based Mobi Back Office application. Back Office is a secure web application that is accessed using your tablet sign-in credentials.


To Edit or Add Events in Your Logs

1. Sign into the Back Office using your company-supplied URL and tablet credentials.
2. Click **HOS Logs**.

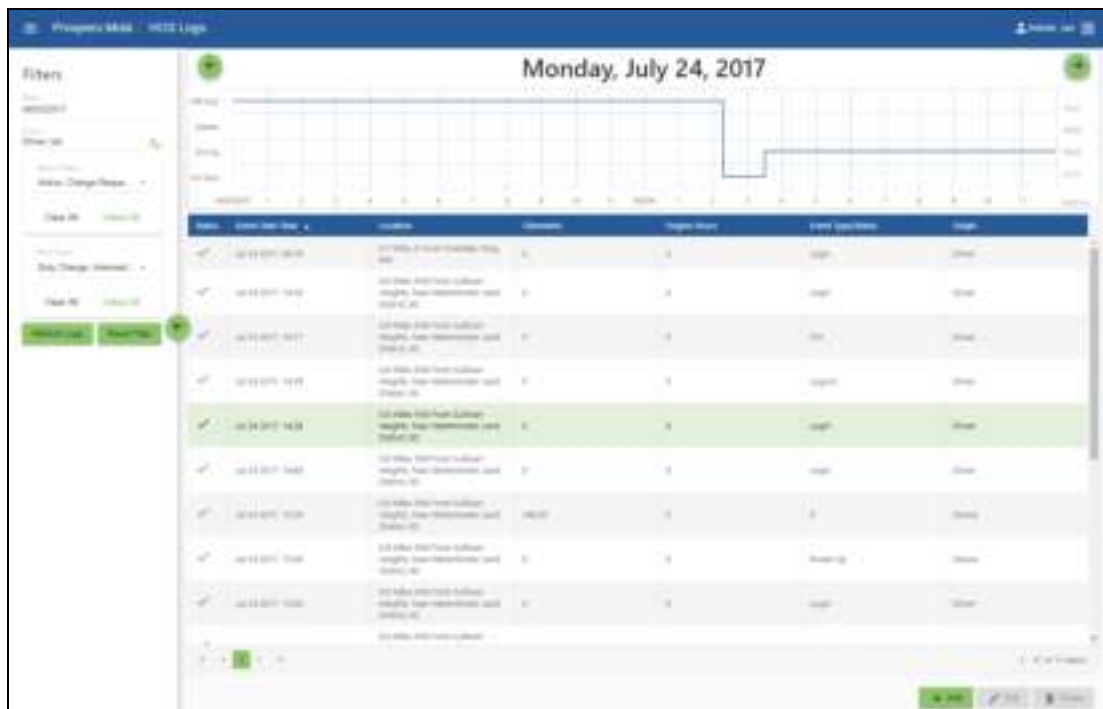

3. Select the event that you want to edit and click **Edit**. Or, to add a new event, click **Add**.

4. Add or edit the **Duty Status Time**.

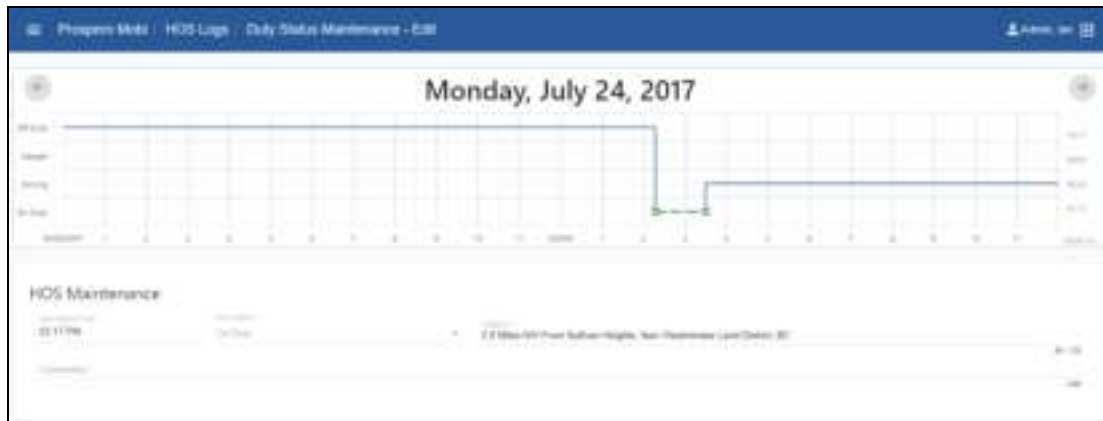


5. Add the **Duty Status**. **Note: Duty Status** cannot be edited on existing events.
6. Add or edit the event **Location**.
7. Add or edit the event **Comments**.
8. Click **Save**.

To Delete Events in Your Logs

1. Sign into the Back Office using your company-supplied URL and tablet credentials.

2. Click **HOS Logs**.

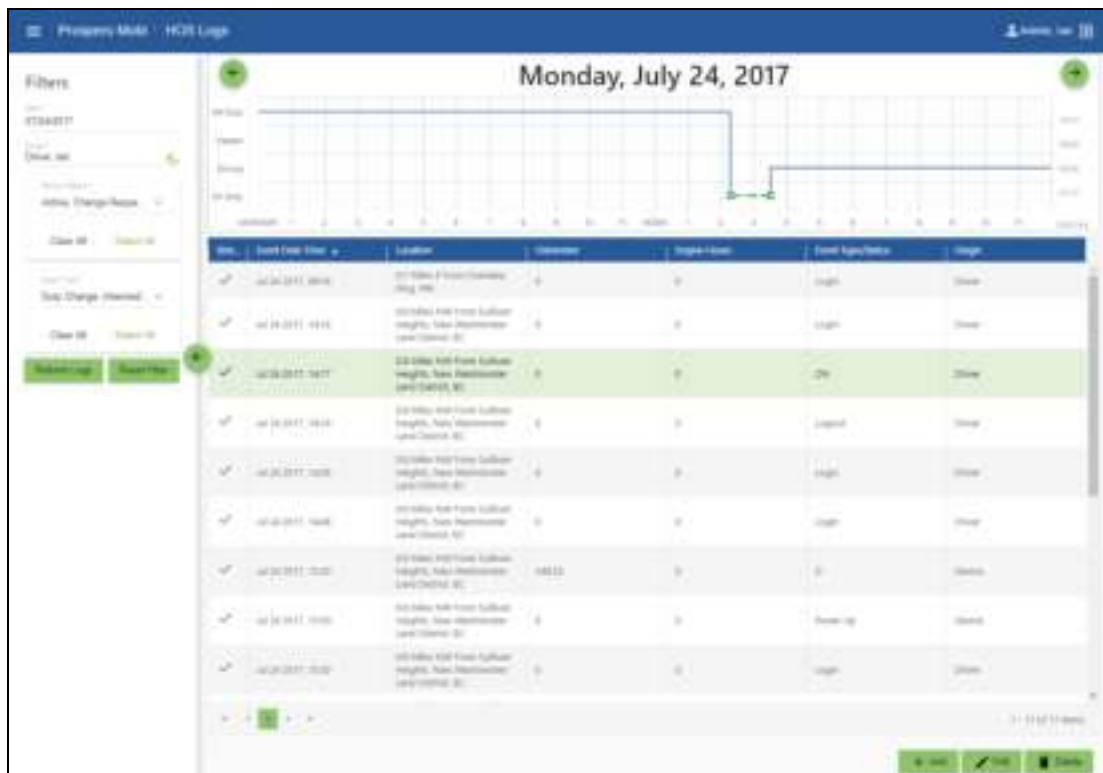

3. Select the event that you want to delete and click **Delete**.
4. Click **Delete** to confirm the event deletion.

Delete Duty Status

Are you sure you want to delete this duty status?

Cancel
Delete





Events can be filtered by their status (active, changed, change requested and change rejected).


Motor Carrier Edit Suggestions

Mobi does not allow anyone to change your logs without your review and approval. The Mobi tablet alerts you whenever there are pending (company recommended) edits. You review, approve or reject pending edits using either the Mobi tablet or Back Office. In the event of pending edits, Mobi will display a white pending edits alert in the header as illustrated below.




To view the pending edits

1. Tap the home icon  in the header.
2. Tap the message icon  in the header.
3. Review your pending edits.

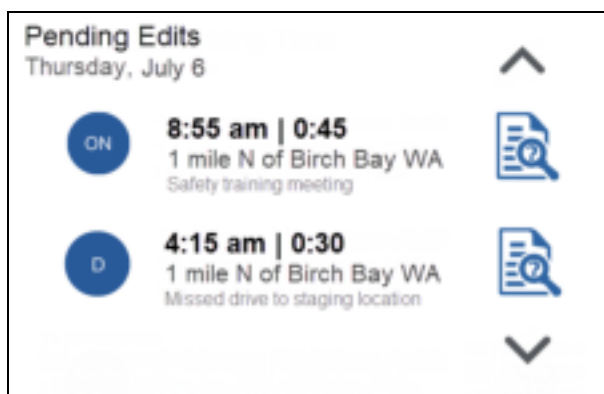

Tap the up and down arrows to move between days.

4. Tap  to view the selected pending record details.

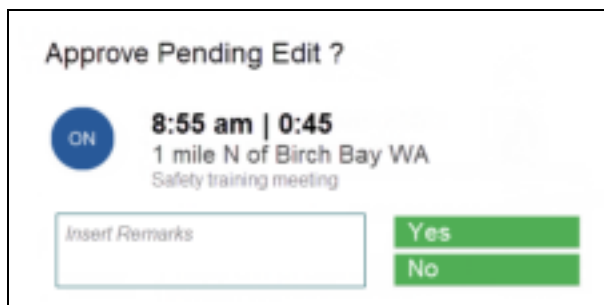

5. Enter your comments.

6. Tap **Yes** to approve the pending edit or **No** to reject it.
7. Confirm your acceptance or rejection of the pending edit.




Ensure that you are using the correct driver account to view your messages. See **Switching Accounts**.


Certifying Driver Logs

Driver records must be certified at the end of each twenty-four hour period. It's best practice to certify your logs at the end of each trip. Perform the following steps to certify your current and previous day driver logs.

To Certify Logs

1. Tap the **HOS** icon on the home screen.
2. Tap the **HOS Logs** icon.

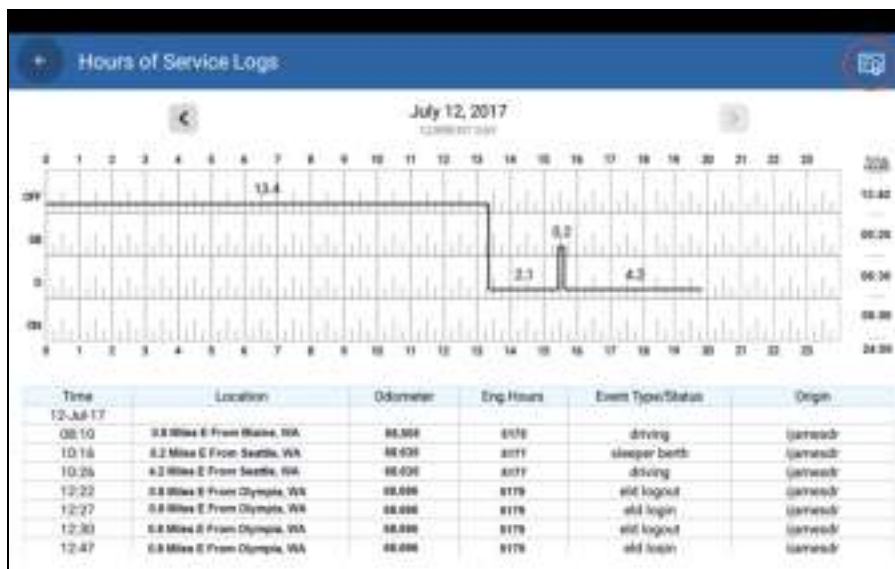

3. Ensure that your driver logs are true and correct before you certify, then tap the  icon to certify your logs.
4. Tap the checkbox to certify the current or all twenty-four hour periods.

Certify Logs

☐ Current 24-hour period

☐ All 24-hour periods

Cancel

Continue

5. Tap the **Continue** button.

6. Tap **Agree** to confirm the certification. Tap **Not Ready** to cancel the certification.




Logs must be re-certified if you make any subsequent driver log additions or edits.



DOT Roadside Inspection Guide

Mobi retains your detailed log history and displays all required standardized data for authorized safety officials on demand. It includes three elements: a daily header, graph grid showing driving duty status changes, and detailed daily log data. Roadside inspectors will expect to view your log history for the last week plus the current day. The tablet is easily removed from its dash-board mount so that it can be handed to the roadside inspector for examination of your records.

To Present Logs for Inspection

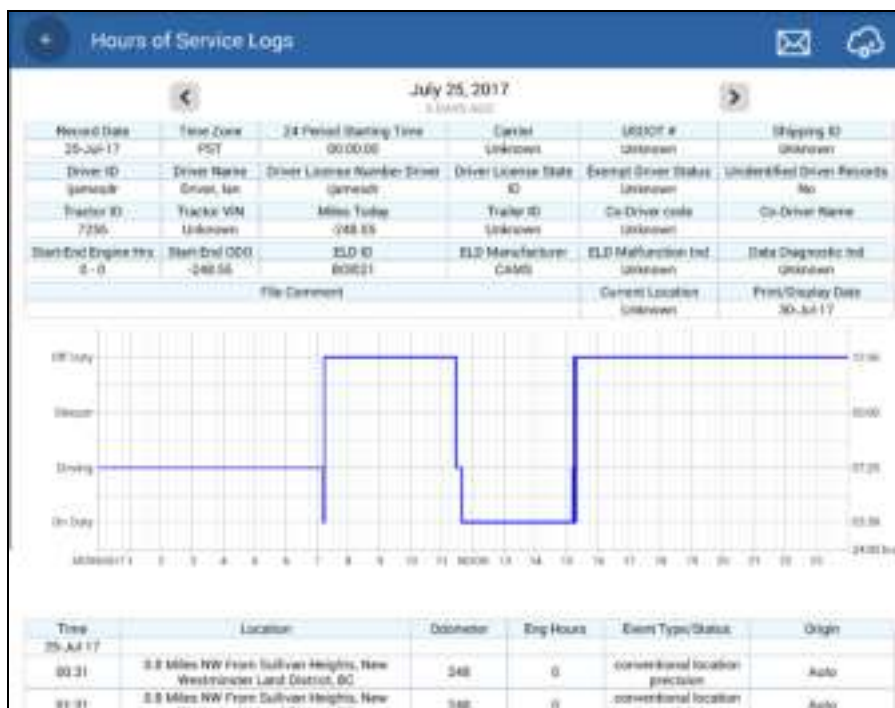1. Tap the **HOS** icon on the home screen.
2. Tap the **DOT Inspection** button. Mobi displays all FMCSA ELD data required for roadside inspection.



3. Remove the tablet and hand it to the roadside inspector to review.
4. The roadside inspector taps  and  to view your driver logs for the current and previous seven days.




Driver logs can be exported via email or web services. See **ELD Data Transfer**



ELD Data Transfer

You are required to provide your log history for the last week plus the current day to be either viewed by the roadside inspector (see the **DOT Roadside Inspection Guide**) or, at their discretion, exported by either email or web services as required.

To Export Logs for Inspection

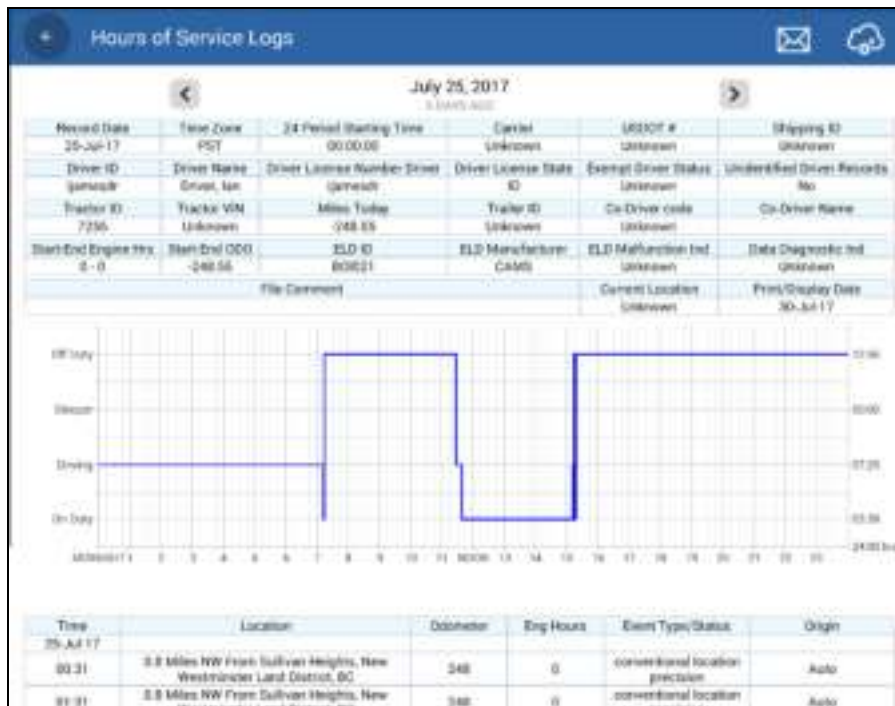
1. Tap the **HOS** icon on the home screen.
2. Tap the **DOT Inspection** icon. Mobi displays the daily header, your 24-hour duty status grid and record of certified events.





3. Tap the  icon to email your driver logs to a preconfigured (4.10.1.2) address.
4. Tap the  icon to send your driver logs to the preconfigured FMCSA website.


Unidentified Driver Records

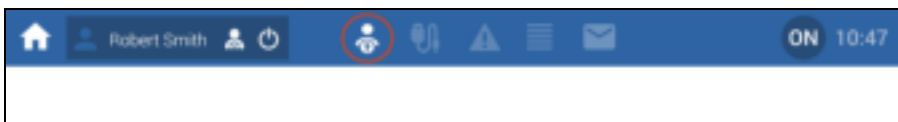Mobi automatically records all driving time, including time frames when no driver has signed in. You can claim unidentified driving time if you forgot to sign in before driving. In the event there are unidentified records, Mobi will display a white unidentified records alert in the header as illustrated below.




To view and assign the unidentified records

1. Tap the home icon  in the header.
2. Tap the message icon  in the header.
3. Review identified drive times for the selected day.

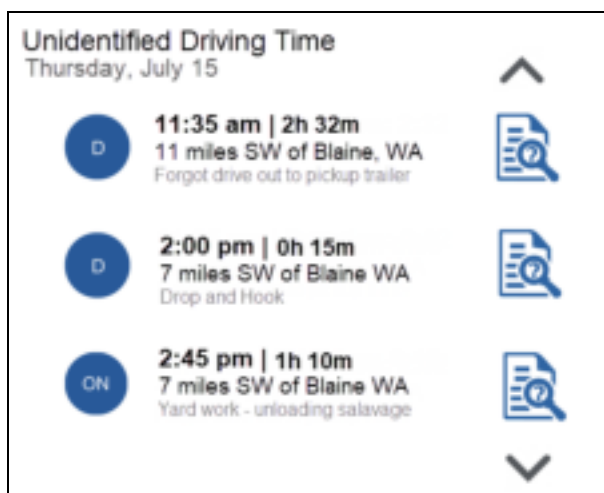

Tap the up and down arrows to move between days.

4. Tap  to view the unidentified driving time details.

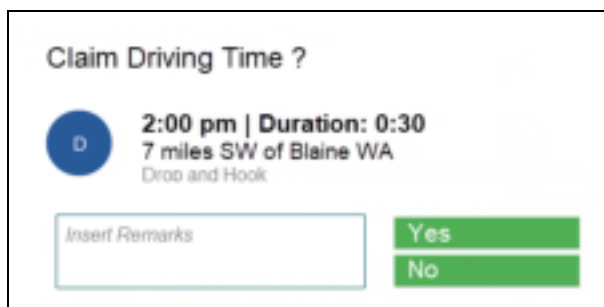

5. Enter your comments.
6. Tap **Yes** to claim the unidentified drive time or **No** to reject it.
7. Confirm your claim or rejection.

Team Driving

Mobi allows two drivers to sign in to the tablet before the vehicle is put into motion. Two drivers may be required for team driving, training or loading and unloading assistance.

Only one driver is designated active (i.e., the driver of the vehicle) and they cannot interact with the tablet when the vehicle is in motion. Another driver can only be set as the active driver when the vehicle is stationary and the current active driver sets their duty status to **Off Duty**, **On Duty** or **Sleeper Berth**. See **Setting Active Driver** for more information.

Only the co-driver, if signed in before the vehicle is put in motion, can view and edit information when the vehicle is in motion. Drivers can switch accounts to view and edit their respective logs at any time when the vehicle is not in motion. Once in motion, however, only the co-driver is able to switch accounts. See **Switching Accounts** for more information.

Setting Active Driver

The first driver to sign in is set to active (i.e., the vehicle driver). The second driver to sign in is set to inactive (i.e., the co-driver) by default. The inactive driver can be made active only when the vehicle is not in motion.

To set the active driver

1. When the vehicle is stopped, the active driver must change their duty status to **Off Duty**, **On Duty** or **Sleeper Berth**.
2. Tap the driver account tool in the notification panel.
3. Tap the inactive driver icon to activate that driver.



4. Tap the **Agree** button on the change active driver confirmation message.



5. Other driver is now active.



Setting the active driver does not switch active accounts. See **Switching Accounts**.

Switching Accounts

Two drivers can be signed in concurrently if they do so before the vehicle is put into motion. As long as the vehicle is stationary, drivers can switch accounts to view and edit their respective logs. Once in motion, however, only the inactive driver (co-driver) can interact with the tablet. In the event the vehicle is put into motion using the active driver's account, the inactive driver retains the ability to activate their account.

To switch accounts

1. Tap the driver account tool to open the driver menu.




The active Mobi account is always listed on top.

2. Tap the driver name account you want to activate.



The active driver will be unable to activate their accounts if the vehicle is in motion.

3. Tap the **Agree** button on the change active account confirmation message.

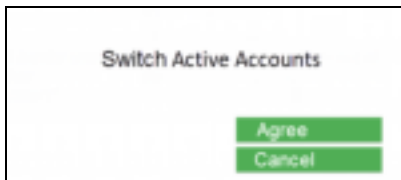

4. Other driver account is now active.



Switching active accounts does not change active drivers. See **Setting Active Driver**.

Reports

The following reports are available to be viewed and printed from the browser-based Mobi Back Office:

To view Reports


1. Sign into the Back Office using your company-supplied URL and tablet credentials.
2. Click **Reports**.
3. Select one of the following reports.
 - » Records of duty status (RODS)
 - » ELD event list
 - » Malfunction and data diagnostic event records
 - » ELD sign-In and sign-out
 - » CMV engine power up and shut down activity
 - » ELD Event list for unidentified drivers
4. Select the report date range.
5. Click **Preview**



Reports can be then be either printed or exported in a user-selected format.



Malfunctions and Data Diagnostic Events

In the event of a system malfunction or data diagnostic event, Mobi will display a red system alert in the header as illustrated below.



You must immediately view the malfunction details and work through the faults using the Mobi malfunction guide that outlines system malfunctions and their recommended actions for resolution.

To view system malfunctions and data diagnostic events

1. Tap the home icon  in the header.
2. Tap the alert icon  in the header.
3. All malfunctions and data diagnostic events are listed in their order of priority.

 A screenshot of the 'Malfunctions and Data Diagnostic Events' screen. It shows a table with the following columns: Event Sequence ID, Event Code, Malfunction/Diagnostic Event Code, Event Date, Event Time, Vehicle Miles, Engine Hours, Order Number, and Line Code Check Value. The table is currently empty.

Event Sequence ID	Event Code	Malfunction/Diagnostic Event Code	Event Date	Event Time	Vehicle Miles	Engine Hours	Order Number	Line Code Check Value

4. If there is a malfunction see **Malfunctions** for its code, description and recommended actions for its resolution.
5. If there is a data diagnostic event see **Data Diagnostic Events** for its code, description and recommended actions for its resolution.
6. If you are unable to resolve the problem, contact your company system administrator (see **Technical Support**).



Mobi malfunctions and data diagnostic events should be reviewed and resolved as soon as possible to ensure the accuracy of your driver logs.

Data Diagnostic Events

The following table provides a brief description of Mobi data diagnostic events and the recommended driver actions for their resolution should they arise. In the event of difficulty, contact your company system administrator with the data diagnostic event code and description outlined below.



Mobi data diagnostic events should be reviewed and resolved as soon as possible to ensure the accuracy of your driver logs.

Mobi Data Diagnostic Events		
Code	Description	Resolution
1	Power data diagnostic	Undock and redock the tablet (see Tablet Docking). Wait a moment and see if power is established. If problem persists, contact your system administrator.
2	Engine synchronization data diagnostic	Undock and redock the tablet (see Tablet Docking). Wait a moment and see if the engine connection is established. If problem persists, contact your system administrator.
3	Missing required data elements data diagnostic	Undock the tablet (see Tablet Docking). Turn off the tablet, wait a moment and then turn the tablet back on. Redock the tablet and see if problem is resolved. If problem persists, contact your system administrator.
4	Data transfer data diagnostic	Ensure there is either WiFi or cellular connectivity and manually check for data transfer connectivity. Undock the tablet (see Tablet Docking). Turn off the tablet, wait a moment and then turn the tablet back on. Redock the tablet and see if problem is resolved. If problem persists, contact your system administrator.
5	Unidentified driving records data diagnostic	Log in and either reject or accept the unidentified driving logs. If no other solution resolves the problem contact your system administrator.
6	Other identified data diagnostic event	Contact your system administrator.

Malfunctions

The following table provides a brief description of Mobi malfunctions and the recommended driver actions for their resolution should they arise. In the event of difficulty, contact your company system administrator with the malfunction code and description outlined below.



Mobi malfunctions should be reviewed and resolved as soon as possible to ensure the accuracy of your driver logs.

Mobi Malfunctions		
Code	Description	Resolution
P	Power compliance	Undock and redock the tablet (see Tablet Docking). Wait a moment and see if power is established. If problem persists, contact your system administrator.
E	Engine synchronization compliance	Undock and redock the tablet (see Tablet Docking). Wait a moment and see if the engine connection is established. If problem persists, contact your system administrator.
T	Timing compliance	Undock the tablet (see Tablet Docking). Turn off the tablet, wait a moment and then turn the tablet back on. Redock the tablet and see if problem is resolved. If problem persists, contact your system administrator.
L	Positioning compliance	Undock the tablet (see Tablet Docking). Turn off the tablet, wait a moment and then turn the tablet back on. Redock the tablet and see if problem is resolved. If problem persists, contact your system administrator.
R	Data recording compliance	Undock the tablet (see Tablet Docking). Turn off the tablet, wait a moment and then turn the tablet back on. Redock the tablet and see if problem is resolved. If problem persists, contact your system administrator.
S	Data transfer compliance	Ensure there is either WiFi or cellular connectivity and manually check for data transfer connectivity. Undock the tablet (see Tablet Docking). Turn off the tablet, wait a moment and then turn the tablet back on. Redock the tablet and see if problem is resolved. If problem persists, contact your system administrator.
O	Other detected malfunction	Contact your company system administrator.

Connections



Mobi relies on the following three connections in order to work correctly: J1939 and power cable, cellular network and global positioning system (GPS).


J1939 and Power Cable

In the event that the tablet is incorrectly docked on its dashboard mount, Mobi will display a red disconnect alert in the header as illustrated below.



To view the cable connection status

1. Tap the home icon  in the header.
2. Tap the message icon  in the header.
3. Connection is detailed in the **Vehicle Information Screen**.

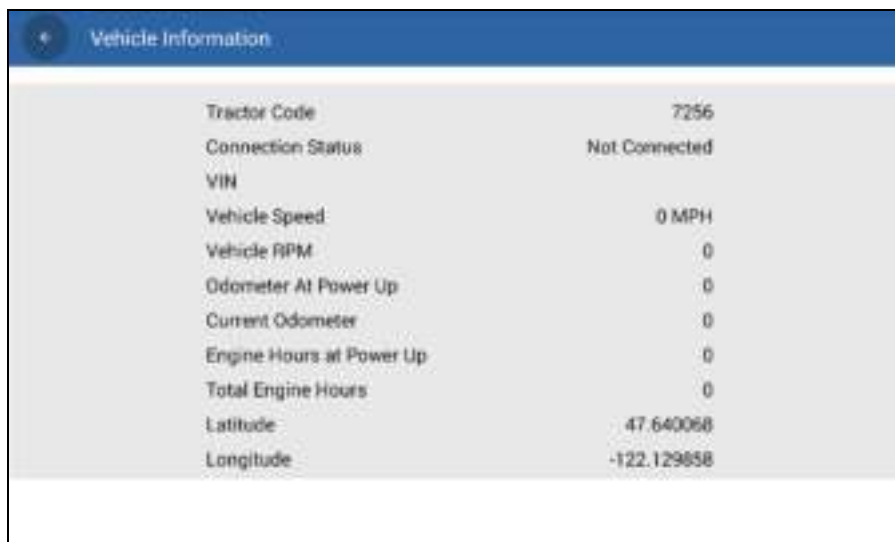

4. If the **Connection Status** is **Not Connected**, Undock the tablet (see **Tablet Docking**) and turn off the tablet. Wait a moment and then turn the tablet back on. Redock the tablet and see if problem is resolved.


Power Connection

View the tablet status bar to verify that the tablet has power.



Cellular Service

View the tablet status bar to verify that the tablet has cellular service.



Active GPS

Pull down and view the tablet status window to verify that GPS is enabled on the tablet.



Contact your company system administrator if you are unable to resolve any tablet connectivity issues.

Tablet Docking

The Mobi tablet can be quickly undocked and redocked from its dashboard mount using the following procedures.

To Undock the Tablet

1. Grasp the tablet firmly and press upward to free the tablet unit from the bottom clamp.
2. Ease the bottom of the tablet unit out of the cradle.
3. Ease downwards and release.

To Dock the Tablet

1. Grasp the tablet unit firmly and align the charging terminal on the tablet and the cradle.
2. Fit the top clamps into the grooves on the tablet case and press upward to extend the clamps.
3. Push the tablet back to sit flush with the cradle.
4. Ease downwards and release.

Technical Support

In the event that operational or technical assistance is required, contact your company system administrator at:

Name: _____

Tel: _____

Email: _____

If there is a system alert, provide you administrator with the malfunction or data diagnostic event and its description (see **Diagnostics**).

Screenshots

You can also help by taking and forwarding a screenshot. Taking screenshots can vary from device to device, but in the case of most Samsung™ devices, you can take a screenshot by holding on the power button and home button of the tablet at the same time for five seconds (until the screen flashes). The power button can be found on the top of the right side of the tablet, and the home button is the big button on the front.